

Three & Four Bag Dust Extraction

Introducing the FB3 and FB4 series of three bag and four bag extraction units.

These machines are ideal for the larger workshop with 3 or more machines running simultaneously.

The series of machines have many features such as: proven reliability, easy maintenance, low operating cost, operator friendly and excellent extraction.



Bagging Units

The three bag extraction unit for larger workshops can run from 3 to 5 machines simultaneously with a top inlet for direct connection to a permanent overhead ductwork system.

This unit would also be suitable for a small moulder via either a multi-inlet or ductwork system to suit individual requirements.


The four bag units are available ex-stock but larger multi-bags up to 20 bags and 20hp are available to special order.

The four bag unit is ideally suited for extraction from a number of machines running simultaneously via an overhead duct work system and also has sufficient extraction volume to service most 4 head planer /moulders. However, if machines are operating for long periods, consideration should be given to waste storage capacity i.e 8 cu ft per bag.

* Please note!


These units are not suitable for extracting fine dust.

Three Bag Dust Extraction Unit

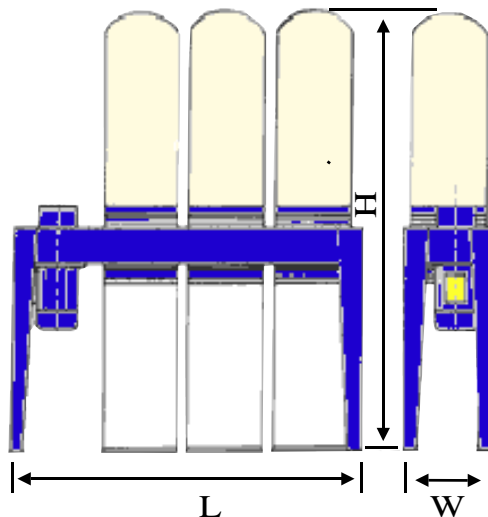

Model	Motor & Phase	Inlet Dia	CFM	Steel Impeller	Starter	L	W	H
FBM3 -5.5	5.5HP - 3ph	250	2400	6mm	D.O.L	2300	600	2500
FBM 3 - 7.5	7.5HP - 3ph	250	2750	6mm	D.O.L	2300	600	2500

Four Bag Dust Extraction Unit

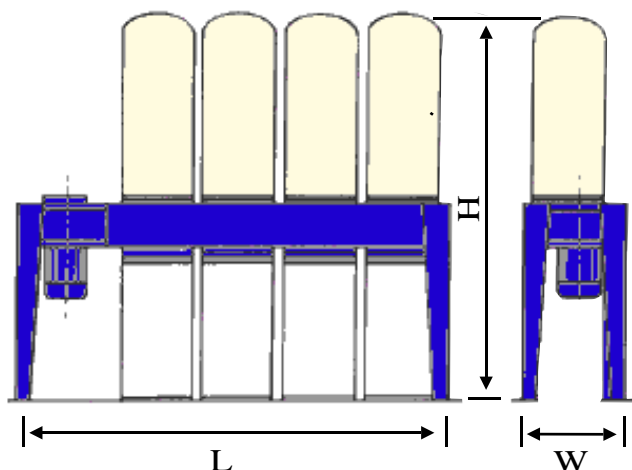

Model	Motor & Phase	Inlet Dia	CFM	Steel Impeller	Starter	L	W	H
FBM4 - 7.5	7.5HP - 3ph	300	2750	6mm	D.O.L	2950	700	2500
FBM4 - 10	10HP - 3ph	300	3250	6mm	Star Delta	2950	700	2500



BAGGING FILTERS



LARGE FILTERS



ANCILLARY



HEATERS



CHIPPERS